


# AS150 ALIGNMENT SHOES



The AS150 Alignment Shoe system makes final precise positioning of a load simple and accurate. Each component is hand-portable, allowing transportation, set-up, and mobilization with minimal personnel and equipment.

AS150 Specifications	
Full System Capacity	<b>150 ton</b> 138 tonne
Capacity Per Shoe	<b>37.5 ton</b> 34 tonne
Cylinder Capacity	<b>10 ton</b> 9 tonne
Cylinder Stroke	<b>4"</b> 100 mm
Cylinder Hydraulic Couplers	Eagle Pro EAB-201 (female)
Working Height	<b>1.5"</b> 38 mm
System Coefficient of Friction	<b>10-15%</b>
Friction Surface Material	UHMW polyethylene
Maximum Slope	<b>+/- 2%</b>
Maximum Operating Pressure	<b>10,000 psi</b> 700 bar

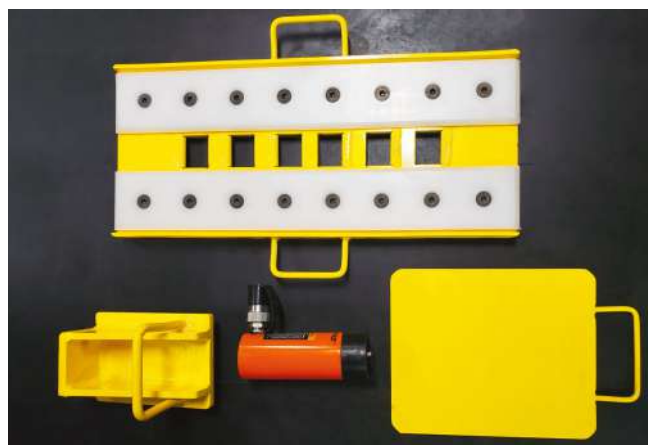

With a 150-ton (138-tonne) capacity, working height of just 1.5" (38mm), and max. component weight of 39 lb (18 kg), this system is designed to be used anywhere, any time.



Dimensions	Length	Width	Height	Weight
Track Section	<b>25"</b> 635 mm	<b>13.625"</b> 346 mm	<b>1.125"</b> 29 mm	<b>39 lb</b> 18 kg
Slider Plate	<b>12"</b> 305 mm	<b>8"</b> 203 mm	<b>0.375"</b> 10 mm	<b>13 lb</b> 6 kg
Push Cylinder & Support	<b>7.25"</b> 184 mm	<b>4.75"</b> 121 mm	<b>4.75"</b> 121 mm	<b>25 lb</b> 11 kg